

SHARKSKIN™

The Ultimate Roof Underlayment

COMP

SHARKSKIN COMP 10 SQ. ROLL

Instructions and Information

SHARKSKIN COMP™

Use: Under composition asphalt shingles and metal roof systems.


Roll size: 48" x 250' approx. Roll weight: 38 lbs. approx.

Coverage: approx. 960 sq. ft. per roll or less depending upon overlap and roof design.




Installation: SHARKSKIN COMP™ roofing underlayment should generally be installed above ventilated attic spaces in most cases. SHARKSKIN COMP™ is considered a vapor barrier, check with local building codes. **Preparation:** The deck surface must be dry and free of dust, dirt, loose nails, debris and other protrusions. **Damaged sheathing must be replaced.** SHARKSKIN COMP™ is laid horizontally parallel to the eave of the roof with the printed side up. Overlaps run with the flow of water in a shingling manner, a minimum 3-inch horizontal laps and a minimum 6-inch vertical laps. Use straight blade utility knife or scissors to cut.

Fastening: SHARKSKIN COMP™ is attached to the roof deck with No.12 gauge corrosion-resistant steel or stainless steel ring shank fasteners, having 1-inch diameter corrosion resistant metal round cap, tin tag, or plastic round top caps or plastic caps fastened with corrosion resistant staples. See Diagram 1.

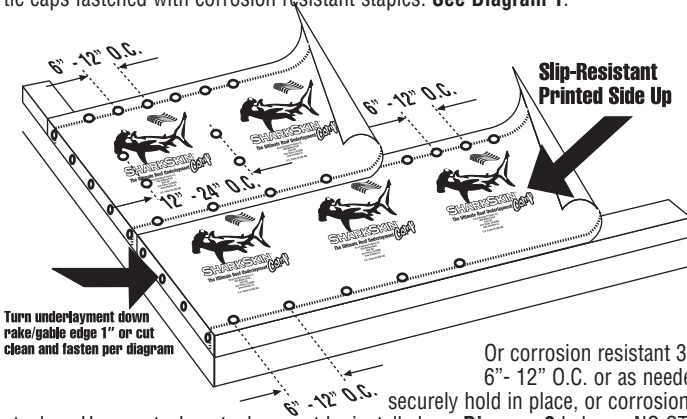

BE CAREFUL TO OBSERVE SAFE ROOFING CODES & PRACTICES (OSHA). USE CAUTION WHEN WALKING OR STANDING ON SHARKSKIN COMP™. COEFFICIENT OF FRICTION MAY CHANGE WITH WET, DUSTY OR ICY CONDITIONS. FAILURE TO USE PROPER SAFETY GEAR AND FOOTWEAR CAN RESULT IN SERIOUS INJURY.

staples. Hammertacker staples must be installed **per Diagram 2** below. NO STAPLES in the field of the roof. ONLY STAPLE AT HORIZONTAL AND VERTICAL LAPS. EXPOSED STAPLES MUST PENETRATE THROUGH TWO LAYERS OF SHARKSKIN COMP™. IMPROPER INSTALLATION WILL VOID ANY WARRANTY CLAIM. See Hammertacker Staple Installation* **Diagram 2** below.

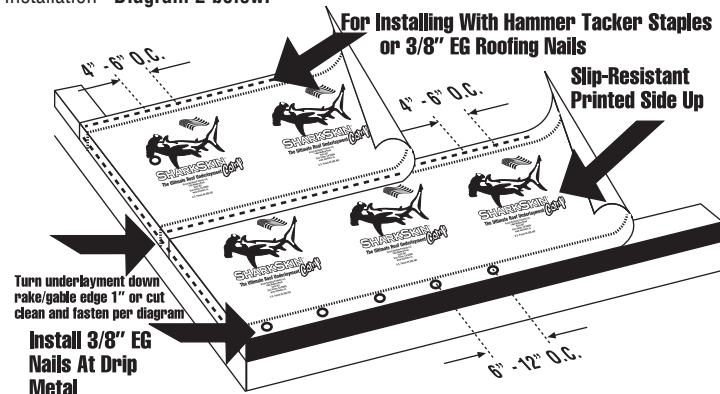

Florida Building Code (FBC) #FL1655



ESR-1708
ICC-ES AC188
ICC-ES AC48
EXCEEDS ASTM D226



Miami/Dade approval pending.

U.S. Patent #6,308,482

Kirsch Building Products LLC
1464 Madera Road, #N Suite 387
Simi Valley, CA 93065
www.sharkskin.us
1-877-742-7507

The underlayment shall be fastened as necessary to hold in place to allow for safe walk ability for the installer. *HAMMERTACKER STAPLE INSTALLATION.
COPYRIGHT ©2009 by Kirsch Research and Development LLC.

