

SHARKSKIN™

The Ultimate Roof Underlayment *Ultra*

SHARKSKIN ULTRA 10 SQ. ROLL

Instructions and Information

SHARKSKIN ULTRA™

Use: Under tile, metal, slate and asphalt shingle roof systems.

Roll size: 48" x 250' approx. Roll weight: 45 lbs. approx.

Coverage: approx. 960 sq. ft. per roll or less depending upon overlap and roof design.



Installation: SHARKSKIN ULTRA™ roofing underlayment should be installed above ventilated attic spaces in most cases, as it is considered a vapor barrier, check with local building codes. The deck surface must be dry and free of dust, dirt, loose nails, debris and other protrusions. Damaged sheathing must be replaced. SHARKSKIN ULTRA™ is laid horizontally parallel to the eave with the printed side up, and minimum 2-inch (4-inch is recommended) horizontal laps and a minimum 6-inch vertical laps. Use straight blade utility knife or scissors to cut. Overlaps run with the flow of water in a shingling manner. SHARKSKIN ULTRA™ is attached to the roof deck with corrosion-resistant 3/8" roofing nails, or No. 12 gage corrosion-resistant steel or stainless steel shank having 1-inch diameter corrosion resistant metal round cap, tin tag, or plastic round top caps or plastic caps fastened with corrosion resistant staples. The underlayment shall be fastened as necessary to hold in place and to allow for safe walk ability for the installer.

BE CAREFUL TO OBSERVE SAFE ROOFING CODES & PRACTICES (OSHA). USE CAUTION WHEN WALKING OR STANDING ON SHARKSKIN ULTRA™. COEFFICIENT OF FRICTION MAY CHANGE WITH WET, DUSTY OR ICY CONDITIONS. FAILURE TO USE PROPER SAFETY GEAR AND FOOTWEAR CAN RESULT IN SERIOUS INJURY.




Florida Building Code
(FBC) #FL8097

U.S. Patent #6,308,482

Kirsch Building Products LLC
1464 Madera Road
Suite 367
Simi Valley, CA 93065
www.sharkskin.us



ESR-1708
ICC-ES AC188
ICC-ES AC48
EXCEEDS ASTM D226

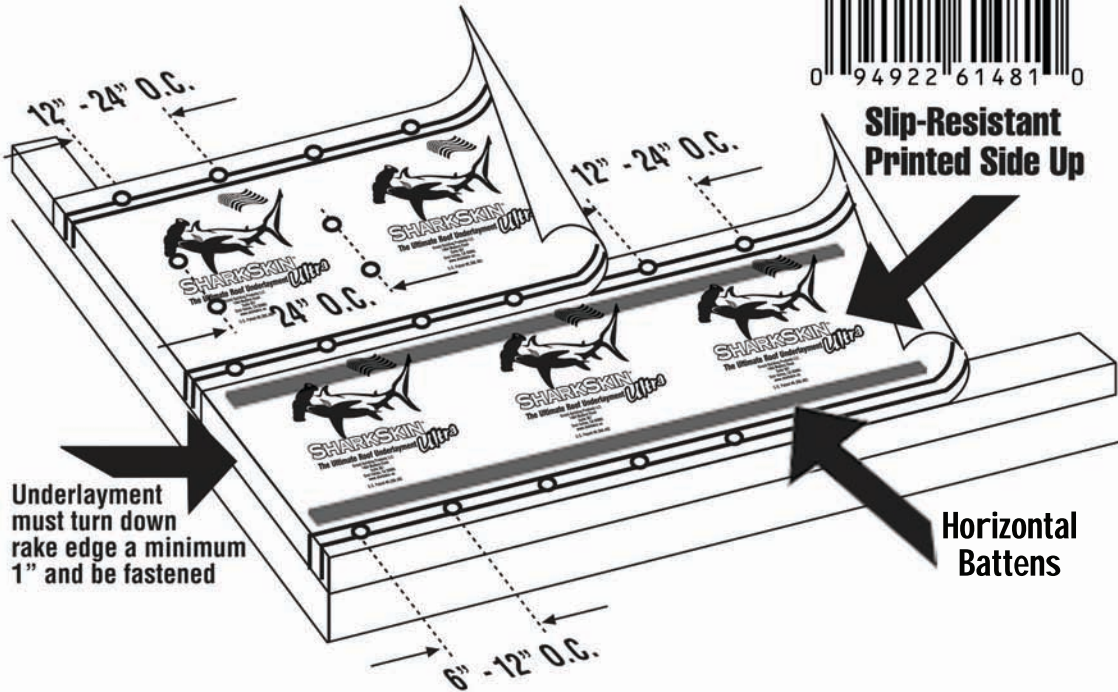

**Slip-Resistant
Printed Side Up**

**Horizontal
Battens**

**Underlayment
must turn down
rake edge a minimum
1" and be fastened**